DE LA ESPADA

0

1

м

A

т

T

н

E

W

н

Ī

Ŀ


T

о

N

LED SPECIFICATION

NITERÓI BY MATTHEW HILTON

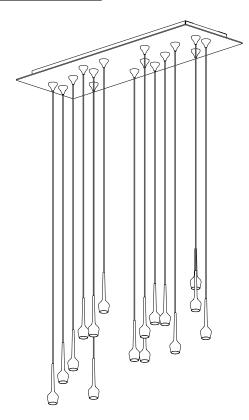

LED QUANTITY PER MODEL 16x LED: 390GL NITERÓI RECTANGULAR 16 PENDANT 16x LED: 390RL NITERÓI ROUND 16 PENDANT 8x LED: 390RM NITERÓI ROUND 8 PENDANT 1x LED: 390RS NITERÓI ROUND SINGLE PENDANT

LED SPECIFICATION

PART NUMBER: A40DOT300000 WATTAGE: 1W COLOUR TEMPERATURE: 3000K BEAM: DIFFUSED RATED INPUT CURRENT: 350mA VOLTAGE: 3V LUMINOUS FLUX: 96 lm DIMENSIONS: 18mmD x 13.5mmH DIAMETER OF LED THREAD: 16mm

LED SPECIFICATION NITERÓI BY MATTHEW HILTON

LED DRIVER QUANTITY PER MODEL	
2x DRIVER: 390GL NITERÓI RECTANGULAR 16 PENDANT	0
2x DRIVER: 390RL NITERÓI ROUND 16 PENDANT	
1x DRIVER: 390RM NITERÓI ROUND 8 PENDANT	2
1x driver: 390rs niterói round single pendant	
LED DRIVER SPECIFICATION	м
PART NUMBER: A40PLK1121WB	
INPUT VOLTAGE: 100÷250WAC - STEADY OUTPUT	<u>A</u>
OUTPUT CURRENT: 350mA	_
OUTPUT VOLTAGE: 45V	<u>T</u>
NUMBER OF LEDS: 9	т.
BUILT-IN CONVERTER: IP40	<u>T</u>
SELF-RESETTING PROTECTION AGAINST OVERTEMPERATURES, AGAINST	H
OPEN CIRCUIT AND AGAINST SHORT CIRCUITS. DIMENSIONS: 82 x 85 x 22 mm	_
DIMENSIONS. 62 X 65 X 22 Mm	E
NOTE: Each manufacturing batch of LEDs is subject to minute	<u>w</u>
variation in colour temperature. The colour temperatures list-	
ed are for guidance and show the average to which batches are	
produced. Where more than one LED is used within the same unit,	H
the LEDs will always be from the same batch for consistency.	Ī
However, where more than one unit is specified for a project, it is essential to indicate such at time of order to ensure all	_
LEDs across the units come from the same batch. If lamps are	L
ordered on separate dates, we cannot guarantee that the LED co-	_
lour temperature will match across the lamps ordered.	<u>T</u>
	<u>o</u>
	N